

A-286 alloy is an age-hardenable iron base superalloy for applications requiring high strength from -320°F up to 1000°F long time, 1300-1500°F short time. Oxidation resistance is high for continuous service to 1500°F, intermittent to 1800°F. Aqueous corrosion resistance is comparable to 316/316L stainless. Heat treatment according to AMS 5525 requires a solution anneal at 1800°F, air cool. Age at 1325°F for 16 hours and then air cool.

Specifications

UNS: S66286 W. Nr./EN: 1.4980 AMS: 5525, 5732, 5737, 5804 GE: B50T1181, B50T12, B50T81

ASTM A 453	AMS	Anneal	Aging Treatment	Yield Strength, Min	Tensile Strength, Min
Grade 660 Class B	5732	1800°F	1300-1400°F, 16 hours	85 ksi	130 ksi
Grade 660 Class A	5737	1650°F	1300-1400°F, 16 hours	95 ksi	140 ksi

Chemical Composition, %

	Cr	Ni	Mo	Co	V	Al	Ti	B	C	Fe	Mn	Si	P	S
MIN	13.5	24.0	1.0	—	0.1	—	1.9	0.003	—	—	—	—	—	—
MAX	16.0	27.0	1.5	1.0	0.5	0.35	2.35	0.01	0.08	balance	2.0	1.0	0.025	0.025

Features

- High strength to 1000°F
- Oxidation resistant to 1500°F

Applications

- Jet engine components
- High temperature fasteners, springs
- Non-magnetic cryogenic equipment

Physical Properties

Density: 0.303 lb/in³ Melting Range: 2350-2460°F

Temperature, °F	200	800	1000	1200	1400
Coefficient* of Thermal Expansion, in/in°F x 10 ⁻⁶	9.2	9.6	9.8	9.9	10.3
Thermal Conductivity Btu • ft/ft ² • hr • °F	8.0	9.8	13.0	14.1	—
Modulus of Elasticity Dynamic, psi x 10 ⁶	—	—	24	22	23

* 70°F to indicated temperature.

Mechanical Properties

Representative Tensile Properties, Sheet AMS 5732, 1800°F/1325°F Heat Treat

Temperature, °F	70 *	70	400	800	1000	1200	1400
Ultimate Tensile Strength, ksi	95 *	145	143	138	131	103	64
0.2% Yield Strength, ksi	50 *	95	93	93	87	88	62
Elongation, %	40 *	24	21	18	18	13	18


* Annealed

Typical Stress-Rupture Strength AMS 5732, 1800°F/1325°F Heat Treat

Temperature, °F	1000	1100	1200
100 Hours, ksi	99	81	61
1,000 Hours, ksi	88	71	46



The Global Leader in Specialty Metals

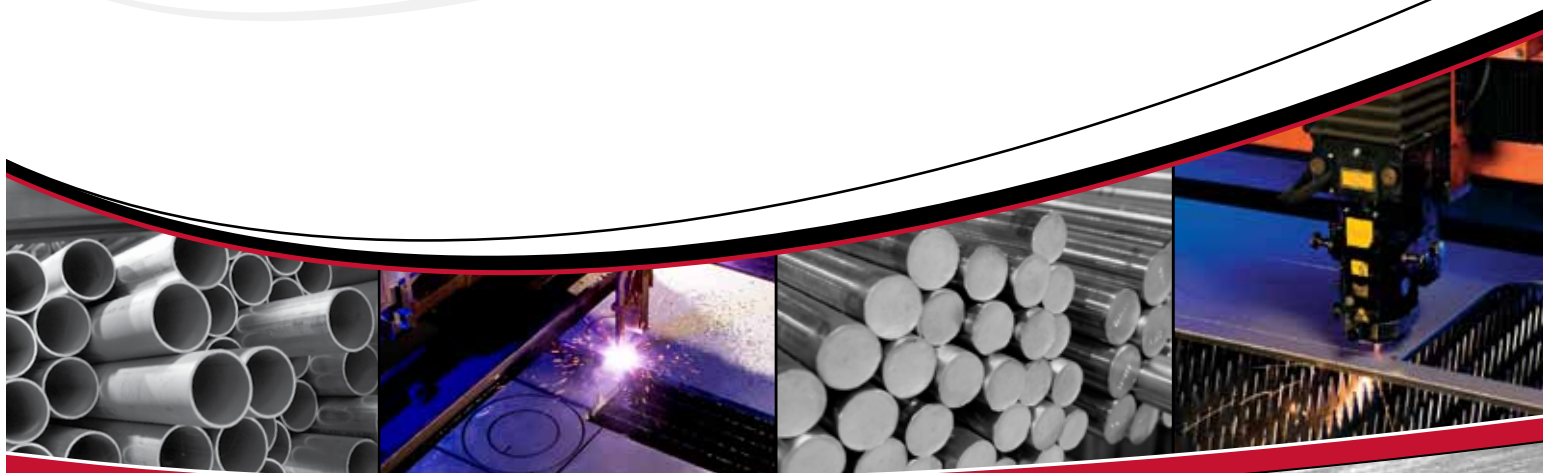

The Global Leader in Specialty Metals